

CARBONWEB® CA-13 GAS & PARTICULATE PLEAT



CarbonWeb® CA-13 combination particulate and gas pleated filter is designed to remove airborne particulate and mitigate nuisance gaseous odors and fumes entering a buildings HVAC system from outside source.



CA-13 is constructed with dual-layer media consisting of a MERV 13 synthetic layer to achieve LEED level efficiency, and 200 gsm of High Activity Carbon (HAC) to remove and control lower concentrations of noxious gases and fumes without system modification.




The expansive HAC surface area from fine mesh carbon greatly increases the dwell time required to capture unwanted and harmful gases with first-pass efficiency.



MERV 13 rated filters have a dust spot removal efficiency of 80%-90% and are highly efficient filters for commercial and industrial use, removing a higher range of particles for a cleaner environment in occupied spaces.



CarbonWeb media is designed and manufactured in the USA to exacting standards.

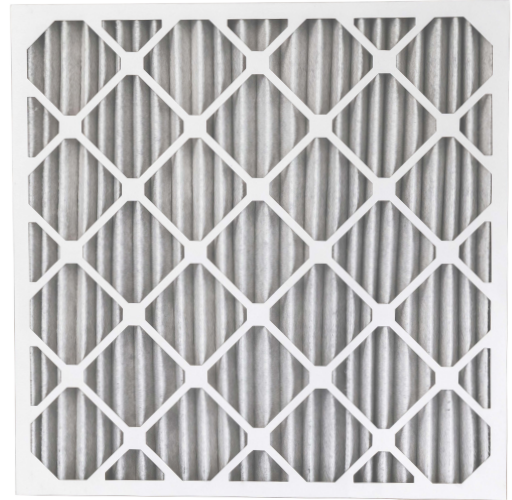

CARBONWEB CA-13

Constructed with a dual-layer MERV 13 particulate and 200 gsm High Activity Carbon

- Commercial Buildings and Office Space
- Congested Traffic Areas - City Locations
- Buildings with Air Intakes Near Freeways
- Restaurant and Food Odors
- Arenas
- HVAC System IAQ Upgrade Without Modification


Model	Nominal Size	High Activity Carbon/ PP	Case Weight	Initial Resistance WC	Initial MERV	Final Resistance WG
CarbonWeb CA-13				500 FPM		
CWCA-13-02-050-08	24x24x2	200 gsm	12.7 LBS	0.53"	13	1.2"
CWCA-13-04-100-08	24x24x4	200 gsm	10.3 LBS	0.47"	13	1.2"

SPECIFICATIONS


- **Media:** Dual-layer combination media consisting of a MERV 13 synthetic particulate layer laminated to a 200 gsm High Activity Carbon 20x50 mesh layer.
- **Frame:** Heavy Duty 28-point beverage board for industrial applications. 1", 2" and 4" frame depths available.

- **Sealant:** Media pack shall be bonded to frame utilizing moisture resistant adhesive for continuous seal.
- **Gasketing:** Optional premium closed cell neoprene gasketing available.
- **Maximum Operating Temp:** 140°F.

PERFORMANCE DATA

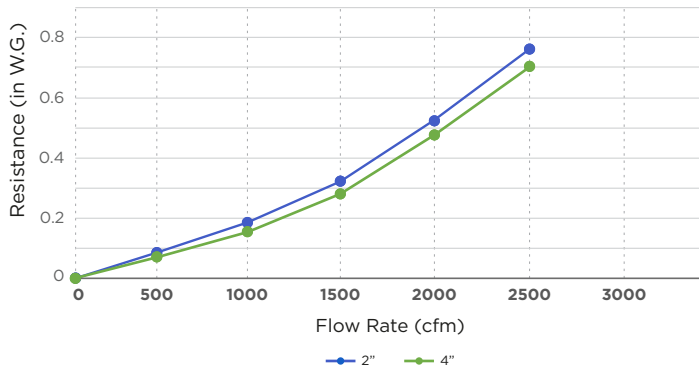

INITIAL PARTICLE SIZE REMOVAL EFFICIENCY

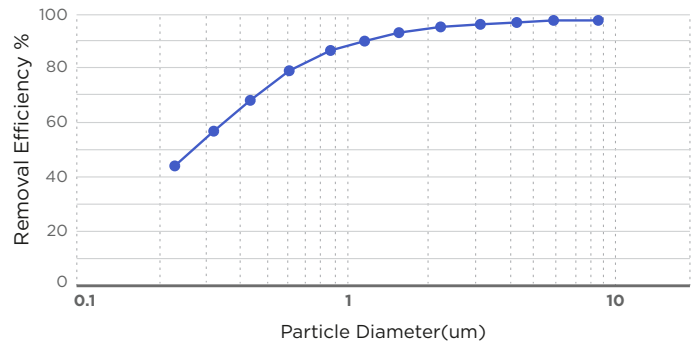


AVAILABLE STANDARD SIZES

12x24x1	12x24x2	12x24x4
16x20x1	16x20x2	16x20x4
16x25x1	16x25x2	16x25x4
18x24x1	18x24x2	18x24x4
20x20x1	20x20x2	20x20x4
20x24x1	20x24x2	20x24x4
20x25x1	20x25x2	20x25x4
24x24x1	24x24x2	24x24x4

SPECIAL SIZES AVAILABLE

MERV 13 LAYER

Bonded to 200 gsm Carbon Matrix with Support Scrim



Universities



Restaurants



Office



Hospital



High Traffic

For questions and orders contact
Rensa Filtration at info@rensafiltration.com
or visit rensafiltration.com

D-Mark

130 N. Groesbeck Highway Mt. Clemens, MI 48043
800-343-3610 | www.dmarkinc.com