

CARBONWEB® VMP-X V-BANK MINI-PLEAT



CarbonWeb® VMP-X V-Bank Mini-Pleat is an exceptionally high-quality industrial grade HVAC molecular air filter specifically designed to remove and mitigate diesel exhaust and aviation fuel fumes entering a buildings HVAC system from an outside source. Typical applications include helipads, loading docks, airports, construction sites and HVAC systems located near freeways or heavy traffic areas.



VMP-X is constructed with a very heavy and dense 600 gsm weight proprietary blend media of various high activity carbons, impregnated carbons and impregnated activated alumina especially designed to react with and help remove lower concentrations of the multiple harmful gasses generated by diesel and aviation fuel combustion such as NOx, formaldehyde and carbon monoxide.



The heavyweight CarbonWeb® media is manufactured via patented thermo-bonding process using exceptionally fine 20x50 mesh carbons and activated alumina. Heavy media constructed with fine mesh granules greatly increases surface area and dwell time required to capture harmful gases with high first-pass efficiency. All CarbonWeb media is designed and manufactured in the USA to exacting standards.



CARBONWEB VMP-X

is constructed with very heavyweight 600 gsm media specifically designed to remove and mitigate diesel and aviation fuel exhaust fumes entering HVAC systems.


- Helipads and Helidecks - Hospital & Private Loading Dock Fumes from Idling Trucks
- Airports
- Occupied Buildings Near Active Construction Sites with Combustion Engines
- Universities
- Buildings with Air Intakes Near Freeways and High Traffic Areas

Model	Nominal Size	High Activity Carbon	Weight Each	Initial Resistance WC	Initial MERV	Final Resistance WG
CarbonWeb VMP-X				500 FPM		
VMPX-12-100-01	12x24x12	600 gsm	9.0 LBS	0.29"	8	1.5"
VMPX-12-100-06	20x24x12	600 gsm	13.2 LBS	0.29"	8	1.5"
VMPX-12-100-08	24x24x12	600 gsm	16.0 LBS	0.29"	8	1.5"


SPECIFICATIONS

- **Media:** 600 gsm proprietary blend carbons and activated alumina 20x50 fine-mesh granules suspended in a non-woven matrix.
- **Frame:** Double walled high strength plastic v-design frame for industrial applications with minimum resistance to air flow.
- **Sealant:** Media pack shall be bonded to frame utilizing moisture resistant adhesive for continuous seal.
- **Gasketing:** Optional premium closed cell neoprene gasketing available.
- **Maximum Operating Temp:** 140F.
- **Incinerable:** Yes


PERFORMANCE DATA

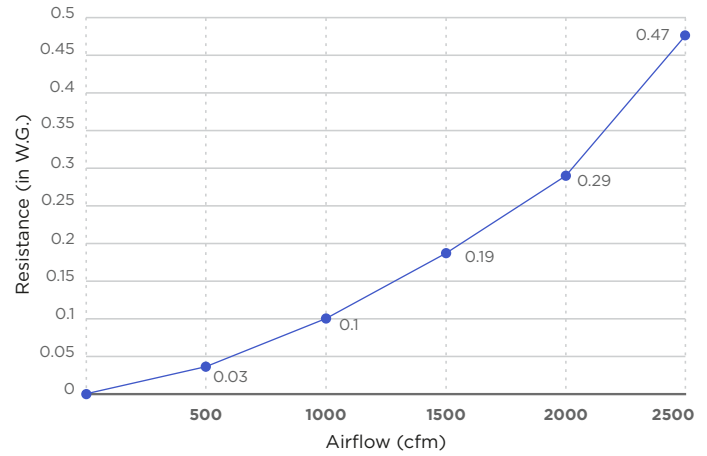

INDUSTRIAL GRADE PLASTIC FRAME with Double Wall Construction

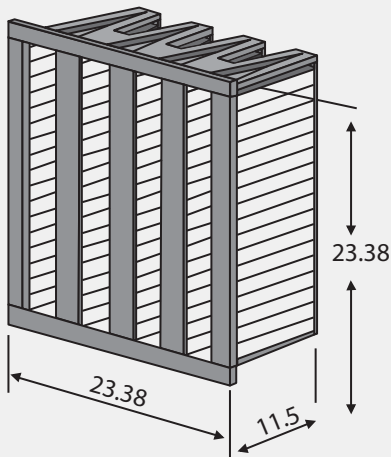

ENGINEERED DESIGN Maximizes Air-Flow and Filter Strength with Reduced Weight



PRECISION PLEATING for Optimum Surface Area and Increased Dwell Time



Diesel Exhaust



Helipads



Airport



High Traffic

For questions and orders contact
Rensa Filtration at info@rensafiltration.com
or visit rensafiltration.com

D-Mark

130 N. Groesbeck Highway Mt. Clemens, MI 48043
800-343-3610 | www.dmarkinc.com